

A Device Independent XML User Agent for Multimedia Terminals

Mikko Honkala, Pablo Cesar, and Petri Vuorimaa

{honkkis, pcesar, pv} @tml.hut.fi
Telecommunications Software and
Multimedia Laboratory
Helsinki University of Technology
Finland

A Device Independent XML User Agent
for Multimedia Terminals



Outline

- Introduction/ Problem
- Background
 - SMIL / XForms
 - Digital Television
- Overview of the Paper
- Requirements
 - Language Profile
 - UI Compatibility
- XML User Agent Implementation
- Case Study
 - Screenshots
 - Evaluation
- Conclusion & Future Work

pcesar@tml.hut.fi
December 13th 2004



Introduction

- "Interacting in Chaos" (1999, by Olsen):
 - Device chaos: "variability of future interactive devices"
- "Past, present, and future of user interface tools" (1999, Myers et. al):
 - "We are at the dawn of an era where user interfaces are about to break out the "desktop" box"
- In conclusion
 - Not so long ago, desktop computer the only multimedia platform
 - Today, the number of interactive devices is growing (e.g., mobile phones, digital television receiver)
 - So, Interactive Multimedia Software running on different devices will be a consumer expectation in the near future

pcesar@tml.hut.fi
December 13th 2004



Problem

- Development of Cross-Platform Interactive Multimedia Applications
 - Multimedia Objects: audio, video, images, fonts
 - User Interaction
 - Temporal Dimension (synchronisation of objects)
- Distribution of multimedia applications using higher abstraction languages: XML based
- XML user Agent: Java most interoperable option available
- Still, Java has different APIs depending on the platform: Component Factory is needed

pcesar@tml.hut.fi
December 13th 2004



Background: SMIL and XForms

- XML based languages: easy to write, like HTML
- Recommendations by World Wide Web Consortium

SMIL

- Language intended for multimedia presentations
- Defines spatial dimension of the document (layout)
- Defines temporal dimensions of the document (synchronisation)
- User input included as links
- Does not define media formats, only integrates them

XForms

- Next generation of web forms
- Not intended as a self-standing document type
- Needs of a host language to provide the document layout (e.g., XHTML, SMIL)
- User input includes: text input, select one, select many, submit
- User input can be validated in the client-side

pcesar@tml.hut.fi
December 13th 2004



Background: Platforms

- In this paper, we consider three different platforms:
 - PC: Java 2 Standard Edition (J2SE)
 - Handheld device: Java 2 Micro Edition (J2ME)
 - High End: Connected Device Configuration (CDC) (personal Java) e.g., Nokia Communicator
 - Low End: Connected, Limited Device Configuration (CLDC), mobile phones
 - Digital Television Receivers: (J2ME, CDC)

	PC	Handheld High End	Handheld Low End	DTV Receiver
UI Library	Swing	AWT	MIDP	HAVi
Input	Keyboard, Mouse	Keypad, stylus	Keypad	Remote control
Output	1800x1440	240x320	176x192	640x496

pcesar@tml.hut.fi
December 13th 2004




Background: Platforms (DTV)

Analog tv:

1 television program in a 6 or 8 MHz channel

Little choices

Receiver: only Television set



Digital tv:

Audiovisual signal is compressed and transported by digital means (MPEG-2 stream).

Spectrum efficiency. Multiple programs in 6 or 8 MHz.

Interactive Services: VoD, banking, games...

Receiver: TV set + decoder.

pcesar@tml.hut.fi
December 13th 2004



Background: Platforms (DTV)

- Each Broadcaster decides how to use its own bit-rate:
 - Only television programs
 - Only interactive applications
 - Television program(s) plus interactive application(s)
- Flexible quality of video and audio signals
 - 3 Mbps is enough for satisfactory video quality.
- Interactive Applications as value added services
 - Java Xlets and XHTML documents
 - Internet access (e-mail, web, ...)

pcesar@tml.hut.fi
December 13th 2004



Background: Platforms (DTV)


- Standards = Horizontal Market
 - Applications and decoders can be developed by different developers and manufacturers.
- DVB Standards (Digital Video Broadcasting)
 - Specifies the transmission in different mediums: DVB-S (Satellite), DVB-C (Cable), DVB-T (Terrestrial)
- MHP (Multimedia Home Platform)
 - Platform independent middleware between applications and receivers
 - Every DTV receiver include them
 - Defines to languages: DVB-J and DVB-HTML
 - DVB-J includes different packages: Home/Audio Video Interoperability (HAVi) is the GUI library

pcesar@tml.hut.fi
December 13th 2004



Overview of The Paper

- Application Layer:
 - XML languages used for implementing interactive multimedia applications
- Platform Layer:
 - User Agent supports the language profile
 - UI Compatibility Layer (Component Factory)
 - Specific Device configuration

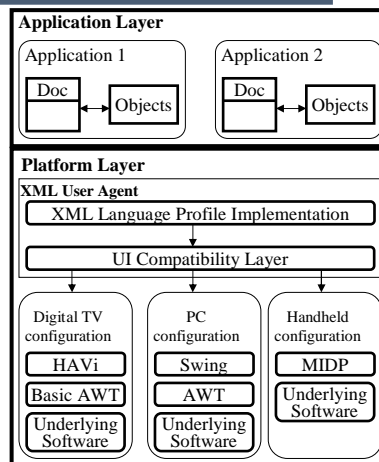


pcesar@tml.hut.fi
December 13th 2004



Requirements: Language Profile

- Temporal Dimension
- Spatial Layout
- Multimedia Objects Support
 - Continuous
 - Discrete
- User Interaction
 - Links
 - Validated Entry
 - Submission (server-side)

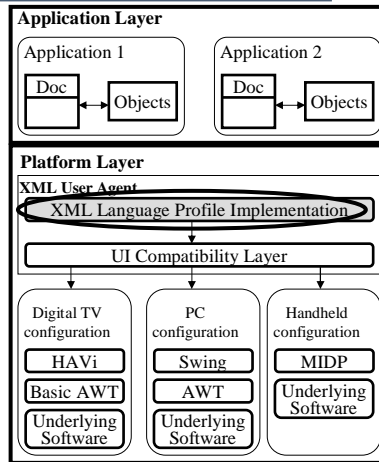


pcesar@tml.hut.fi
December 13th 2004



Requirements: UI Compatibility

- Platform uses Java
- Most platform independent option
- The actual APIs for user interface development differ between multimedia terminals:
 - Digital TV: HAVi
 - PC: Swing
 - Handheld: MIDP

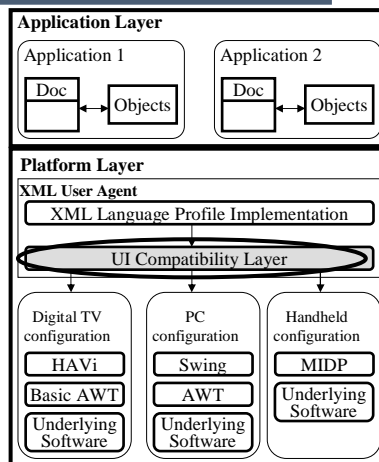

pcesar@tml.hut.fi
December 13th 2004



Requirements: Summary (XML Profile)

Temporal Dimension	SMIL
Spatial Layout	SMIL (no flow layout)
Multimedia Object Support	
Continuous Media	SMIL
Discrete Media	SMIL
User Interaction	
Links	SMIL
Validated Entry	XForms
Submission	XForms

pcesar@tml.hut.fi
December 13th 2004



Requirements: Summary (Platform)

Different Libraries	Java + UI Compatibility Layer
Different Input Mechanisms	Java + UI Compatibility Layer
Different Output Devices	CSS, XSL transformations, or automated content adaptation
Different Capabilities	CSS, XSL transformations, or automated content adaptation

pcesar@tml.hut.fi
December 13th 2004



Implementation: SMIL


SMIL player divided into three layers:

- Core Logic handles timing, layout, hyperlinks, etc.
 - GUI independent
- Viewer Layer draws the user interface
 - Swing, AWT, HAVi GUI versions
- Media Players play media files
 - text, images have custom players, audio, video by JMF
- SMIL Player also integrated into X-Smiles
 - Download it at: www.xsmiles.org

pcesar@tml.hut.fi
December 13th 2004



Implementation: SMIL

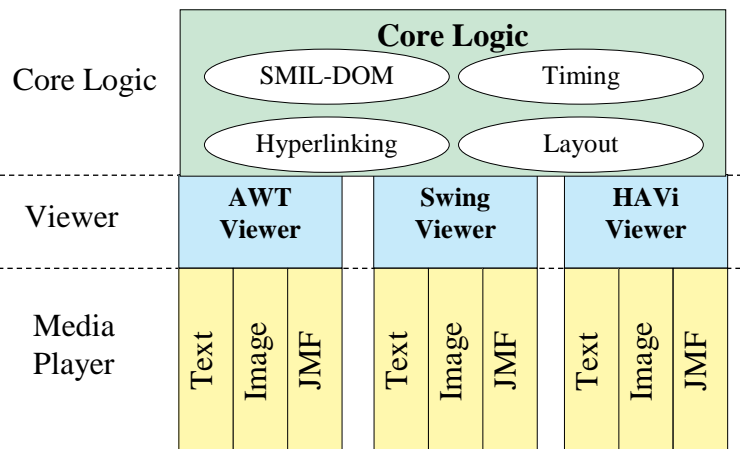

pcesar@tml.hut.fi
December 13th 2004



Implementation: XForms


XForms engine divided into three layers

- XForms model:
 - XML parsers (Xalan, Xerces), validation and calculation engine
- Meta UI:
 - Implementation of repeating user interface constructs and switching parts dynamically
- User Interface: Implementation of form controls
 - High Level: logic implementation, not aware of the actual details
 - Low Level: actual implementation (using a component factory)
- XForms also integrated into X-Smiles
 - Download it at: www.xsmiles.org

pcesar@tml.hut.fi
December 13th 2004



Implementation: XForms

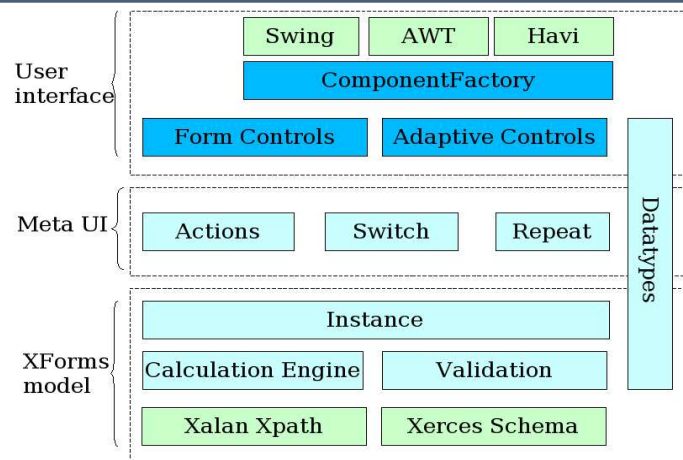

pcesar@tml.hut.fi
December 13th 2004




Implementation: Component Factory

- Generic user interface API
 - Defines abstract widgets (e.g., XInput)
 - Maps those widgets with its actual implementation depending on the device at hand
- Currently three back-ends: AWT (Personal Java), Swing (PC), and HAVi (Digital TV Receiver)
- Benefits:
 - Application is not aware of the specific user interface library in used
 - Developing new back-ends is easy

pcesar@tml.hut.fi
December 13th 2004



Implementation: Component Factory

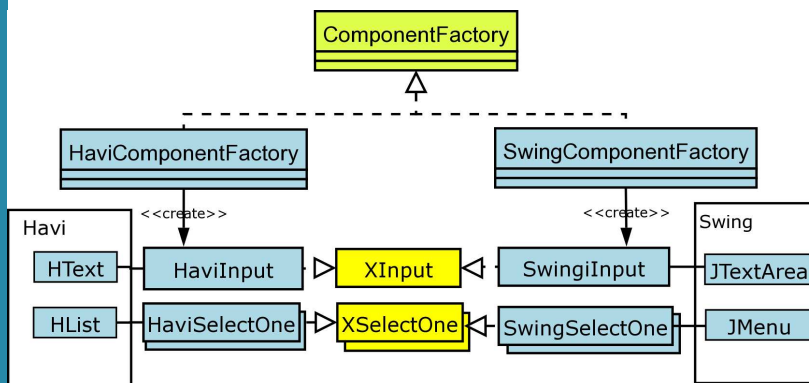

pcesar@tml.hut.fi
December 13th 2004




Implementation: Component Factory

XForms Control	AWT Widget	Swing Widget	HAVi Widget
select1 & select	List	JList	HListGroup
trigger	Button	JButton	HTextButton
submit	Button	JButton	HTextButton
label	TextField	JTextField	HStaticText
textarea	TextArea	JTextArea	HText
input + xsd:string	TextField	JTextField	HSingleLineEntry
input + xsd:date	TextField	JCalendar	HSingleLineEntry
input + xsd:boolean	CheckBox	JCheckBox	HToggleButton

pcesar@tml.hut.fi
December 13th 2004



Implementation: Platform - Ubik

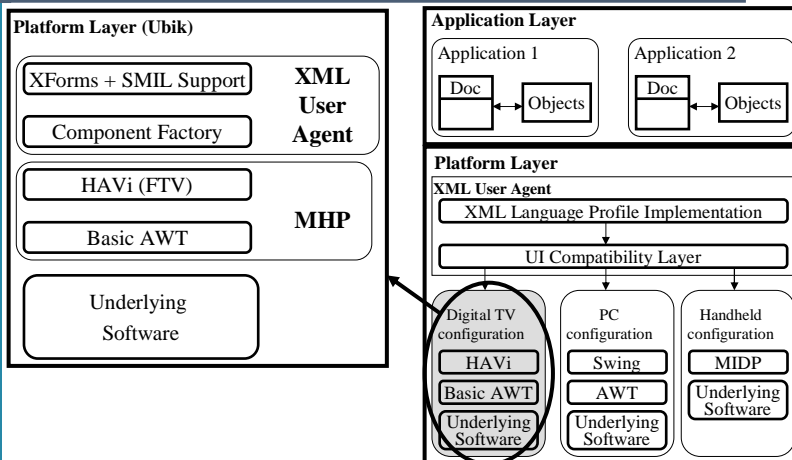

pcesar@tml.hut.fi
December 13th 2004



Implementation: Platform - Ubik


- A Linux based prototype system for configurable digital television receivers
- Based on MHP standard, hence it allows us the study of new ideas for interactive television
- Study how different programming languages should be used for different purposes:
 - Native: 3D graphics demanding applications
 - Java: complex services
 - XML: information services + simple multimedia applications

pcesar@tml.hut.fi
December 13th 2004



Implementation: Platform – Ubik (HAVi)

- All widgets are visible, in addition they could be:
 - Navigable: navigated using the remote control
 - Actionable: launch functionality (buttons)
 - Selectionable: selection of an item or set of items (Lists)
- Each widget has associated a Look class (i.e., view)

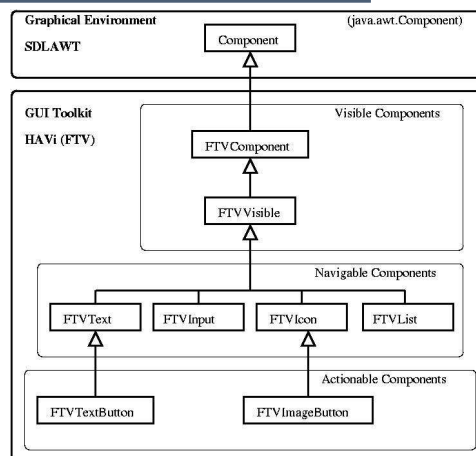

pcesar@tml.hut.fi
December 13th 2004





Case Study: Distance Education Portal

- Author
 - Non-programmer
 - Very easy to produce the content
- User
 - Student accessing from a remote terminal
- Content
 - Attractive multimedia content
- Synchronisation:
 - Internal: video content of the lectures
 - External: slides changing as the lecturer talks
- User Interaction:
 - Navigation: Normal links
 - Exam: submission and validation controls

pcesar@tml.hut.fi
December 13th 2004



Case Study: Screenshots



MITA

Please Select a topic:

- ▶ WaveLan
- ▶ Web Services
- ▶ Quality of Service

Mid-Term Exam 10 secs

1. Which is a WLAN Standard? IEEE 802.11 W3C XForms WAP	2. What is the range of a WLAN station? 5 km 1 km 100 m
--	--



pcesar@tml.hut.fi
December 13th 2004



Case Study: Evaluation

- Includes synchronisation mechanism
 - Cannot be achieved using only HTML
- Includes validation and calculation mechanisms of user input
 - Cannot be achieved using only SMIL
- Application completely developed using declarative languages (SMIL+XForms)
 - Easy to author: no scripting is used
 - Quick to author: number of lines for the whole application is around 256

pcesar@tml.hut.fi
December 13th 2004



Conclusions

- Device Independent XML based user interface model
 - Presentation (SMIL): separates the synchronisation logic from user interface
 - User Interaction (XForms): separates the widgets from their look and feel
 - Component Factory: cross-platform user interface support
- Case Study shows the benefit of the approach
 - easy and fast to develop interactive multimedia applications
- Ubik Environment: prototype of configurable digital television receivers
 - DTV stream: audio, video, composite graphics (transparencies)
 - 3D Graphics support (OpenGL, Java OpenGL): games, basic 3D applications
 - MHP support: services such as Teletext or Navigator
 - X-smiles: support for XML based languages such as XHTML 2.0, SMIL, XForms
- X-smiles have been ported to commercial device:
 - Nokia communicator as a high end handheld device

pcesar@tml.hut.fi
December 13th 2004



Future Work

- SMIL: temporal dimension can be included using Timesheets
 - Similar to CSS, but time
 - Easier to implement
 - Less troublesome
 - Separated time from layout (could use flow layout)
 - Embedded into XHTML
- Some XForms functionality could not be implemented (e.g., switch and repeat)
- In depth study of how the system should react against:
 - Different capabilities (J. V. Ossenbruggen et al.)
 - Different output (J. Smith et al.)
- Study of MIDP (too different from AWT!!)

pcesar@tml.hut.fi
December 13th 2004



Questions

Thank you very much!

Questions ?
Comments ?

pcesar@tml.hut.fi
December 13th 2004